


AC TANKS

Key Features:

- 20" inspection top flip top with hand rail
- One (1) caged ladder from grade to top of tank
- 4" mineral wool insulation on top, sides and bottom
- 2' x 3 Helical Coils, each coil is a nominal 200 ft. in length, plumbed in parallel for minimum heat transfer oil resistance
- Liquid seal scoreboard tank gauge
- 4" vent overfill line
- 3" supply and return and fill lines with 150 lb. flanges
- 1" x 35' loop line for start-up heating
- Temp control with solenoid for heat control
- One (1) NEMA rated control plant
- High level capacitance sensor shut off control for A.C. pump
- Auxiliary 150# 3" flange mounted on top and bottom of tank for Accu-Level or pressure transmitter (tank Tracker System Ready)
- Flange provided for mounting the optional agitator assembly

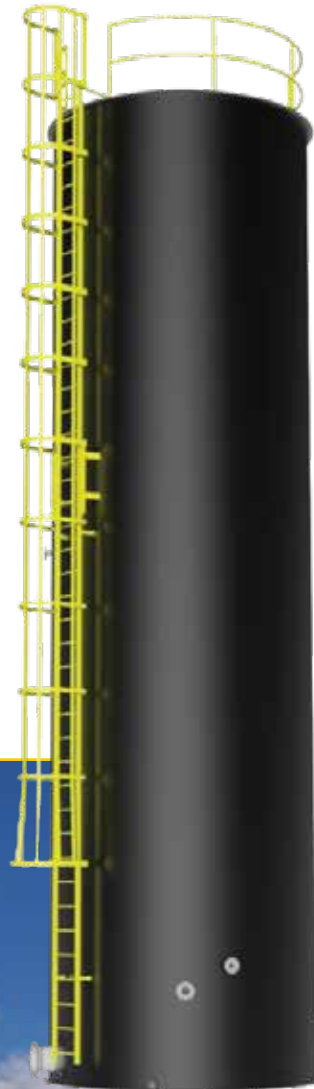

Stansteel®



HOTMIX
parts & service

We Make Your Plant Run Better.

800-826-0223 | stansteel.com | hotmixparts.com